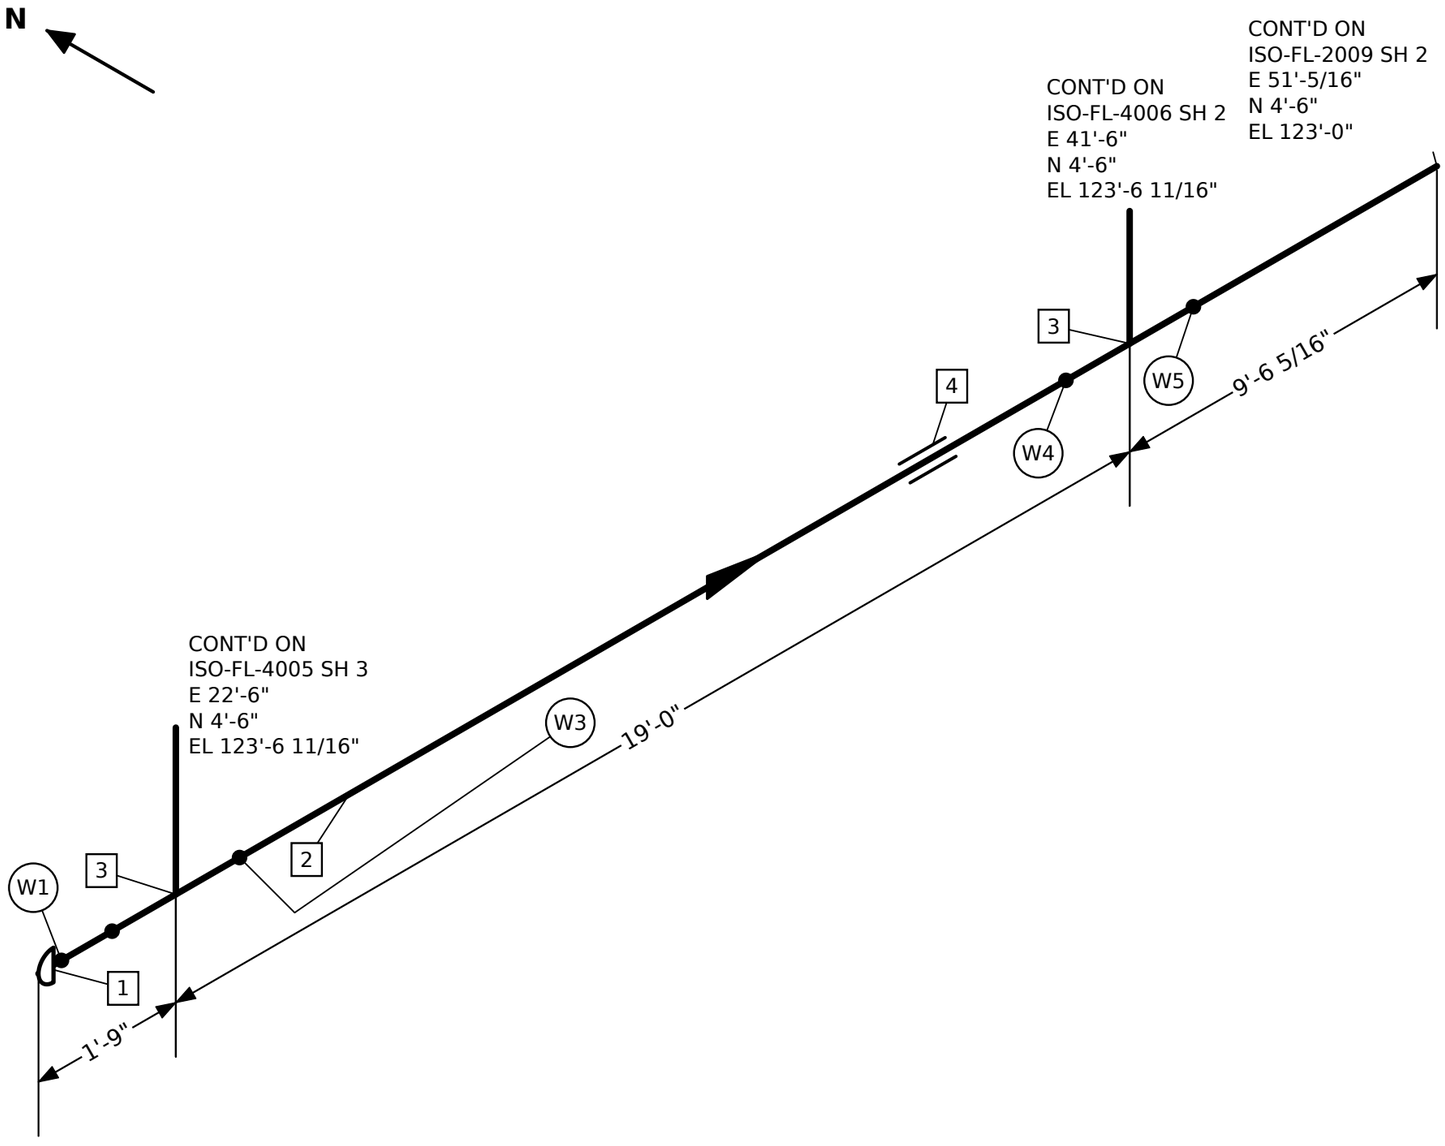


BILL OF MATERIALS

PT	QTY	NPS	DESCRIPTION
1	1	8"	CAP 8" P150
2	27'-9 5/8"	8"	PIPE 8" P150 BEVELLED ENDS
3	2	8"x4"	TEE REDUCING 8" × 4" P150
4	1	8"	GUIDE FOR 8" LINE (GUIDE-8)

REV	DATE	DESCRIPTION	BY
0	2026-11-01	ISSUED FOR CONSTRUCTION	-

COMPANY

SMARTWELD

TITLE

FLARE AND RELIEF OUTLETS

NOTES:


1. ALL DIMENSIONS IN FEET AND INCHES UNLESS NOTED
2. BEVEL ENDS FOR BUTT WELD

TEST PRESS.	INSULATION	PAINT
-	NONE	-
PWHT	NDE	FLUID
-	-	FL

LINE NO.	PIPING CLASS	DESIGN PRESS.	DESIGN TEMP.
8"-P150-FL-2009	F150	150 PSIG	-

DRAWING NO.	SHEET	REV
ISO-FL-2009	1 OF 5	0

DATE	DRAWN	CHECKED	SCALE
2026-11-01	-	-	NTS

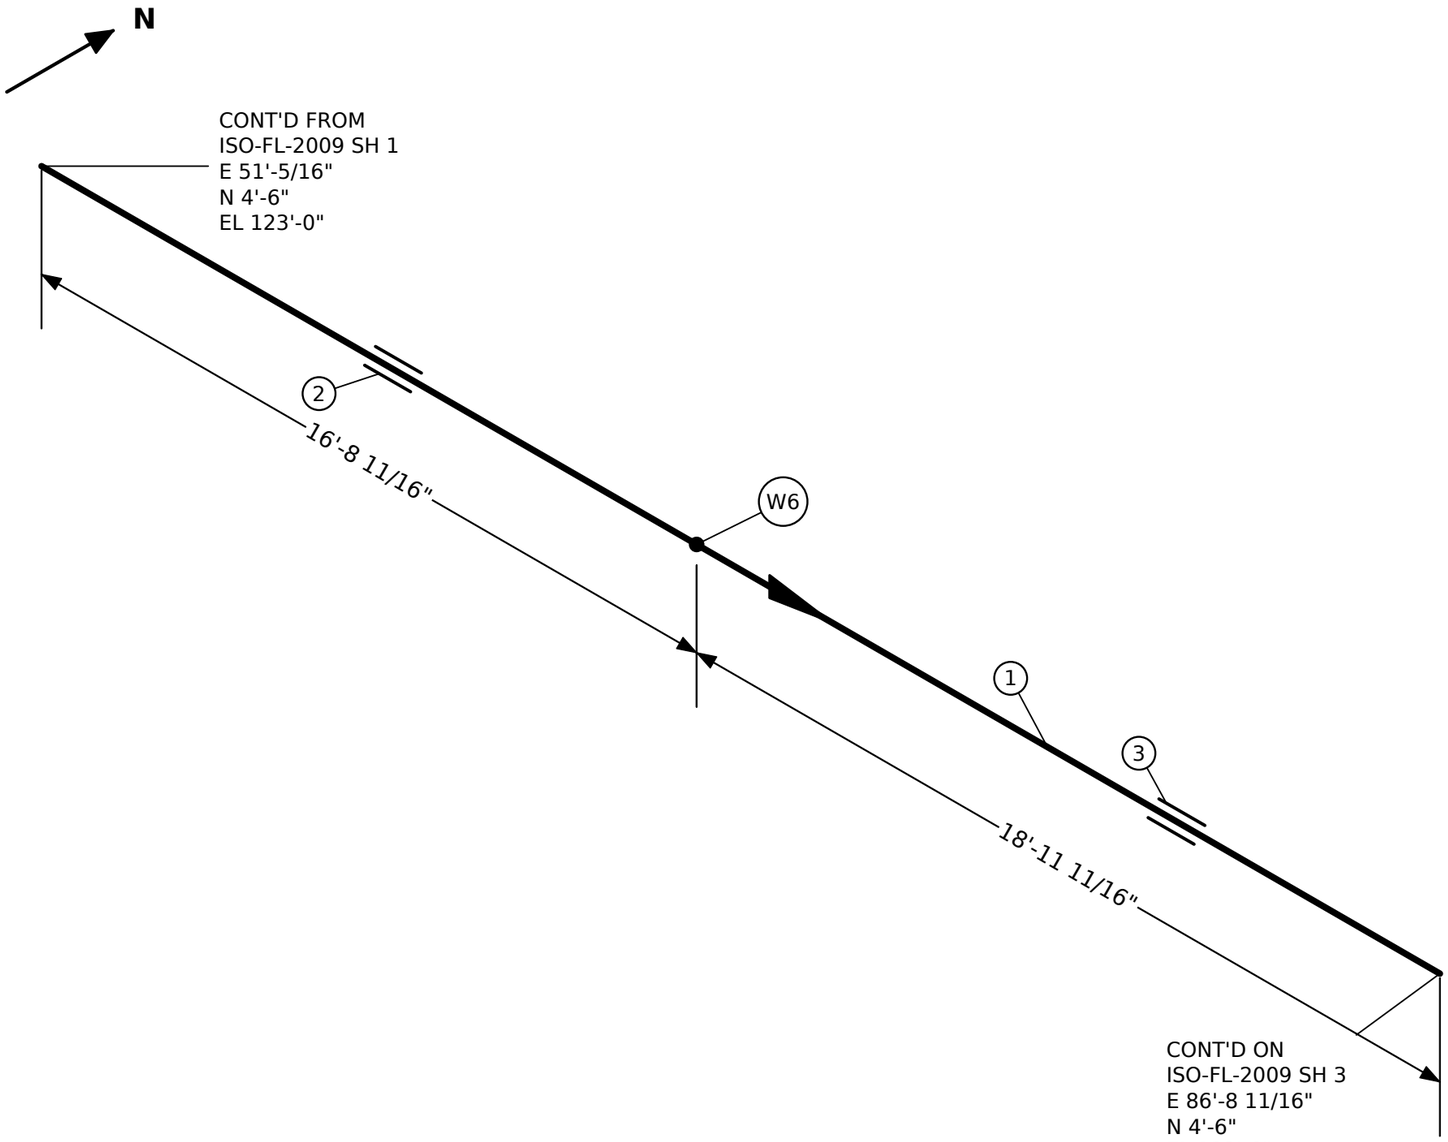

BILL OF MATERIALS

PT	QTY	NPS	DESCRIPTION
1	35'-8 3/8"	8"	PIPE 8" P150 BEVELLED ENDS
2	1	8"	SHOE FOR 8" LINE (SHOE-8)
3	1	8"	GUIDE FOR 8" LINE (GUIDE-8)

REV	DATE	DESCRIPTION	BY
0	2026-11-01	ISSUED FOR CONSTRUCTION	-

COMPANY

SMARTWELD

TITLE

FLARE AND RELIEF OUTLETS

NOTES:


1. ALL DIMENSIONS IN FEET AND INCHES UNLESS NOTED
2. BEVEL ENDS FOR BUTT WELD

TEST PRESS.	INSULATION	PAINT
-	NONE	-
PWHT	NDE	FLUID
-	-	FL

LINE NO.	PIPING CLASS	DESIGN PRESS.	DESIGN TEMP.
8"-P150-FL-2009	F150	150 PSIG	-

DRAWING NO.	SHEET	REV
ISO-FL-2009	2 OF 5	0

DATE	DRAWN	CHECKED	SCALE
2026-11-01	-	-	NTS

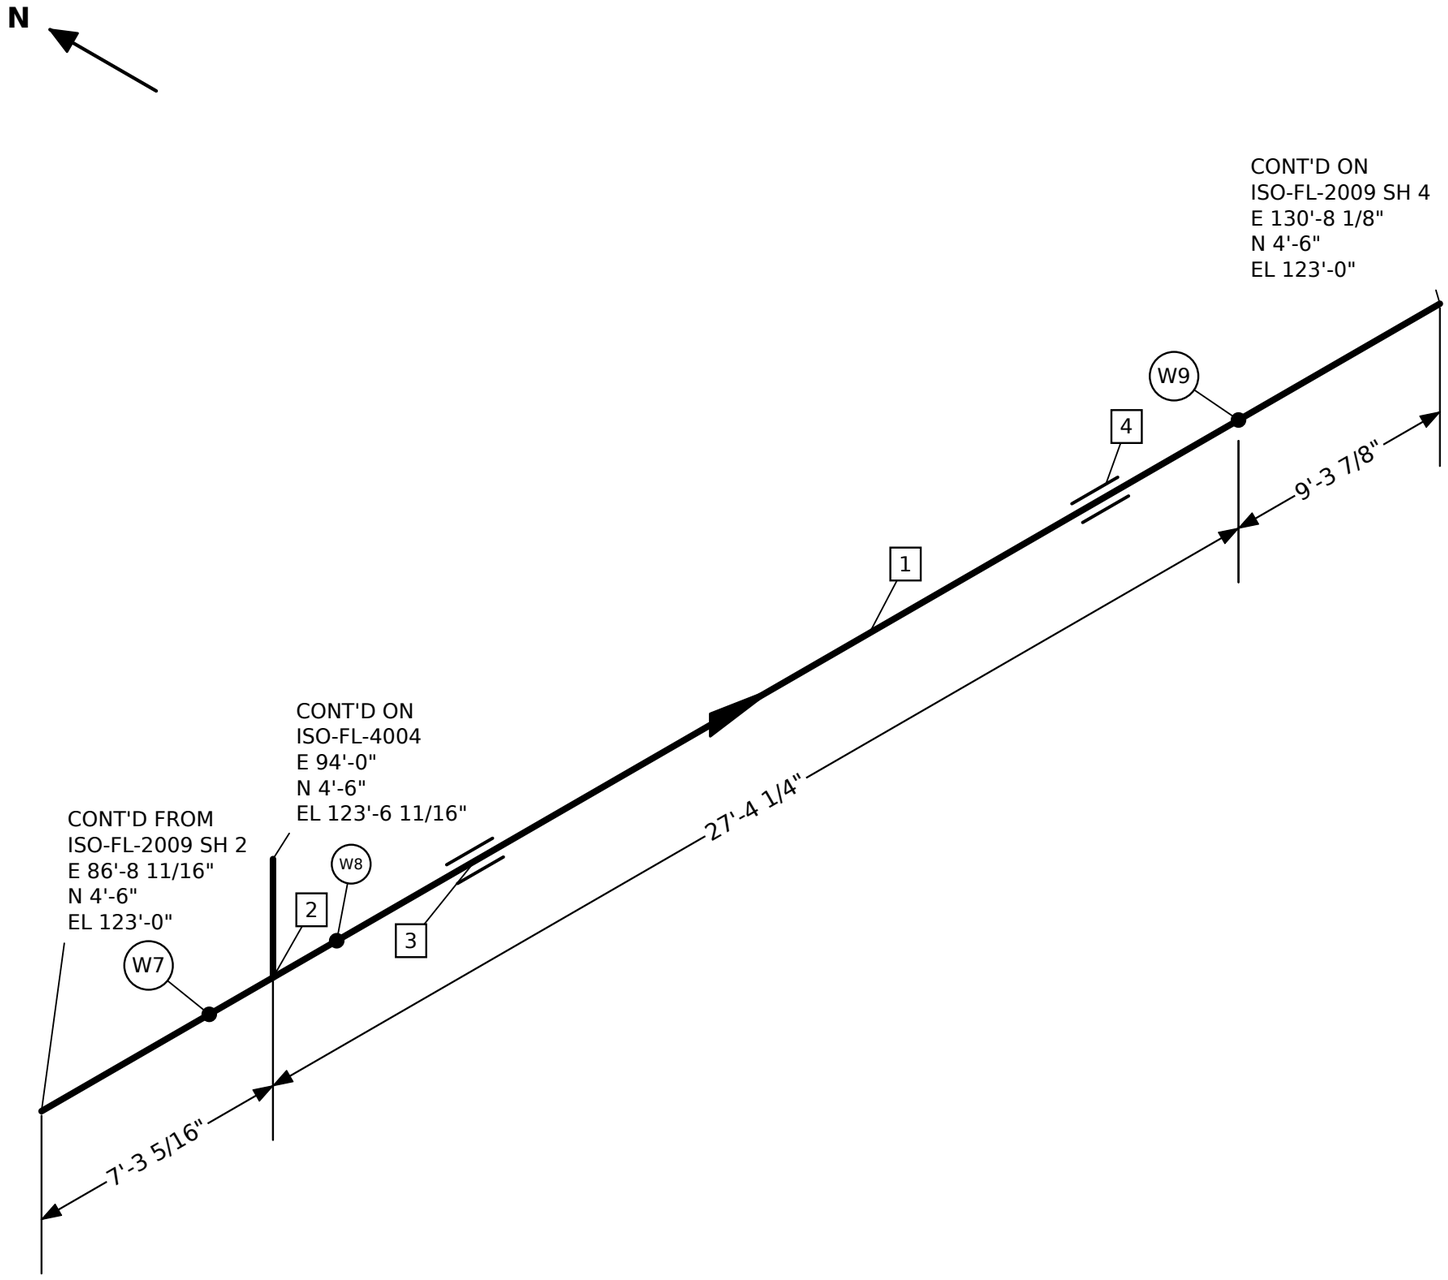

BILL OF MATERIALS

PT	QTY	NPS	DESCRIPTION
1	42'-10 1/8"	8"	PIPE 8" P150 BEVELLED ENDS
2	1	8"x4"	TEE REDUCING 8" × 4" P150
3	1	8"	ANCHOR FOR 8" LINE (ANCHOR-8)
4	1	8"	GUIDE FOR 8" LINE (GUIDE-8)

REV	DATE	DESCRIPTION	BY
0	2026-11-01	ISSUED FOR CONSTRUCTION	-

COMPANY

SMARTWELD

TITLE


FLARE AND RELIEF OUTLETS

NOTES:

1. ALL DIMENSIONS IN FEET AND INCHES UNLESS NOTED
2. BEVEL ENDS FOR BUTT WELD

TEST PRESS. -	INSULATION NONE	PAINT -
PWHT -	NDE -	FLUID FL

LINE NO. 8"-P150-FL-2009	PIPING CLASS F150	DESIGN PRESS. 150 PSIG	DESIGN TEMP. -
DRAWING NO. ISO-FL-2009		SHEET 3 OF 5	REV 0
DATE 2026-11-01	DRAWN -	CHECKED -	SCALE NTS

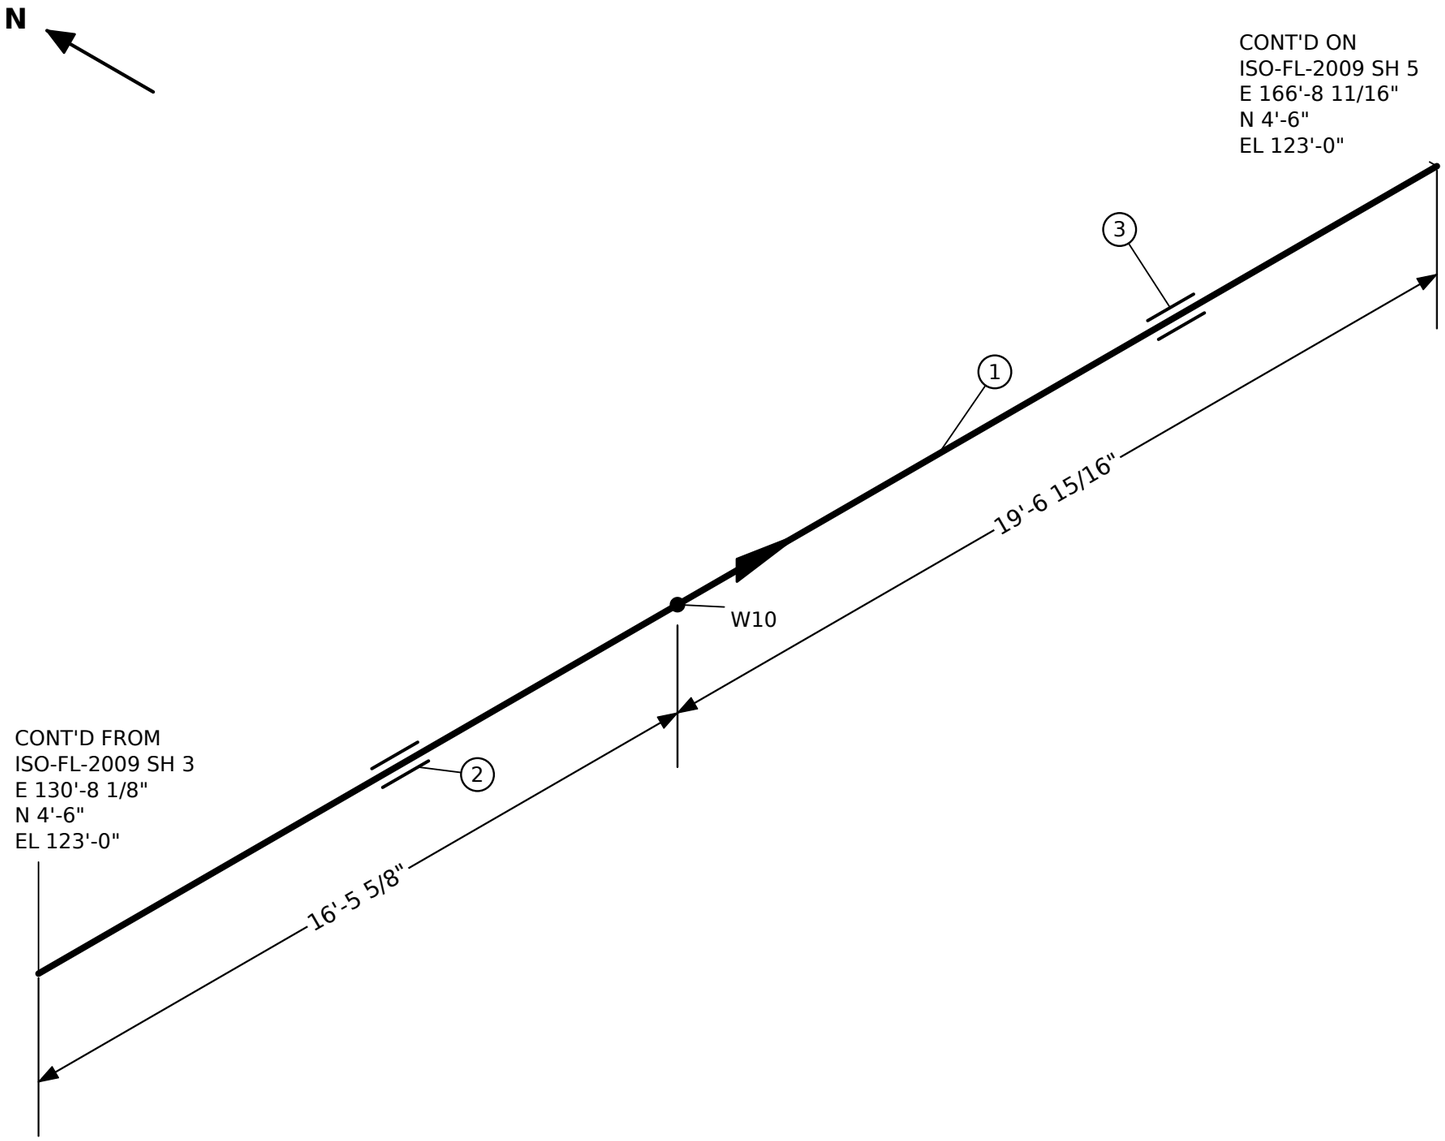

BILL OF MATERIALS

PT	QTY	NPS	DESCRIPTION
1	36'-9/16"	8"	PIPE 8" P150 BEVELLED ENDS
2	1	8"	SHOE FOR 8" LINE (SHOE-8)
3	1	8"	GUIDE FOR 8" LINE (GUIDE-8)

REV	DATE	DESCRIPTION	BY
0	2026-11-01	ISSUED FOR CONSTRUCTION	-

NOTES:

1. ALL DIMENSIONS IN FEET AND INCHES UNLESS NOTED
2. BEVEL ENDS FOR BUTT WELD
3. HYDROTEST BEFORE PAINTING
4. CHECK ORIENTATION BEFORE WELDING

TEST PRESS.	INSULATION	PAINT
-	NONE	-

PWHT	NDE	FLUID
-	-	FL

COMPANY

SMARTWELD


TITLE

FLARE AND RELIEF OUTLETS

LINE NO.	PIPING CLASS	DESIGN PRESS.	DESIGN TEMP.
8"-P150-FL-2009	F150	150 PSIG	-

DRAWING NO.	SHEET	REV
ISO-FL-2009	4 OF 5	0

DATE	DRAWN	CHECKED	SCALE
2026-11-01	-	-	NTS

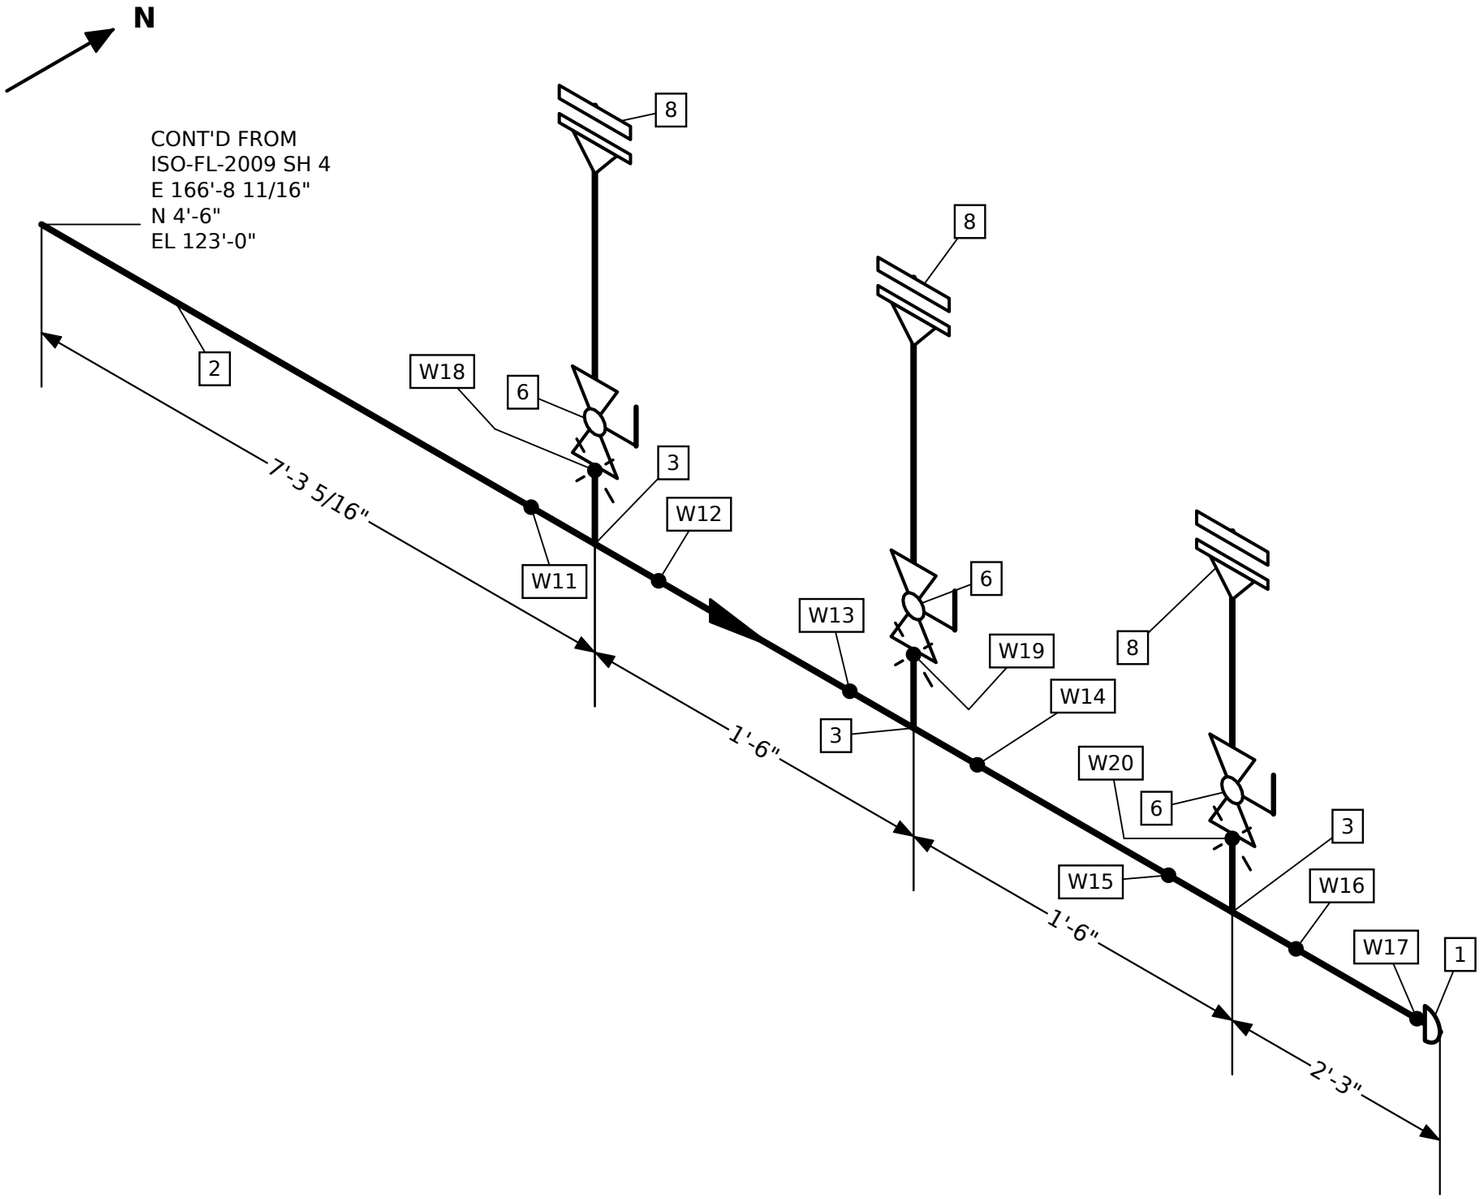

BILL OF MATERIALS

PT	QTY	NPS	DESCRIPTION
1	1	8"	CAP 8" P150
2	8'-11 5/16"	8"	PIPE 8" P150 BEVELLED ENDS
3	3	8"x3/4"	TEE REDUCING 8" × 3/4" P150
4	3	3/4"	FLANGE WELD-NECK 3/4" P150 RAISED FACE
5	6	3/4"	GASKET 3/4" P150 COMPRESSED SHEET
6	3	3/4"	VALVE, BALL, FLOATING 3/4" P150
7	6	3/4"	STUD SET 4 × 0.5" × 4-1/4" WITH 2 NUTS, FOR 3/4" P150
8	3	3/4"	FLANGE BLIND 3/4" P150 RAISED FACE

NOTES:
1. ALL DIMENSIONS IN FEET AND INCHES UNLESS NOTED
2. BEVEL ENDS FOR BUTT WELD
3. PAINT PER PROJECT SPECIFICATION
4. REMOVE BURRS FROM ALL CUT ENDS

REV	DATE	DESCRIPTION	BY
0	2026-11-01	ISSUED FOR CONSTRUCTION	-

COMPANY

SMARTWELD

TITLE

FLARE AND RELIEF OUTLETS

TEST PRESS. **-**	INSULATION **NONE**	PAINT **-**	
PWHT **-**	NDE **-**	FLUID **FL**	

LINE NO. **8"-P150-FL-2009**	PIPING CLASS **F150**	DESIGN PRESS. **150 PSIG**	DESIGN TEMP. **-**
DRAWING NO. **ISO-FL-2009**		SHEET **5 OF 5**	REV **0**
DATE **2026-11-01**	DRAWN **-**	CHECKED **-**	SCALE **NTS**