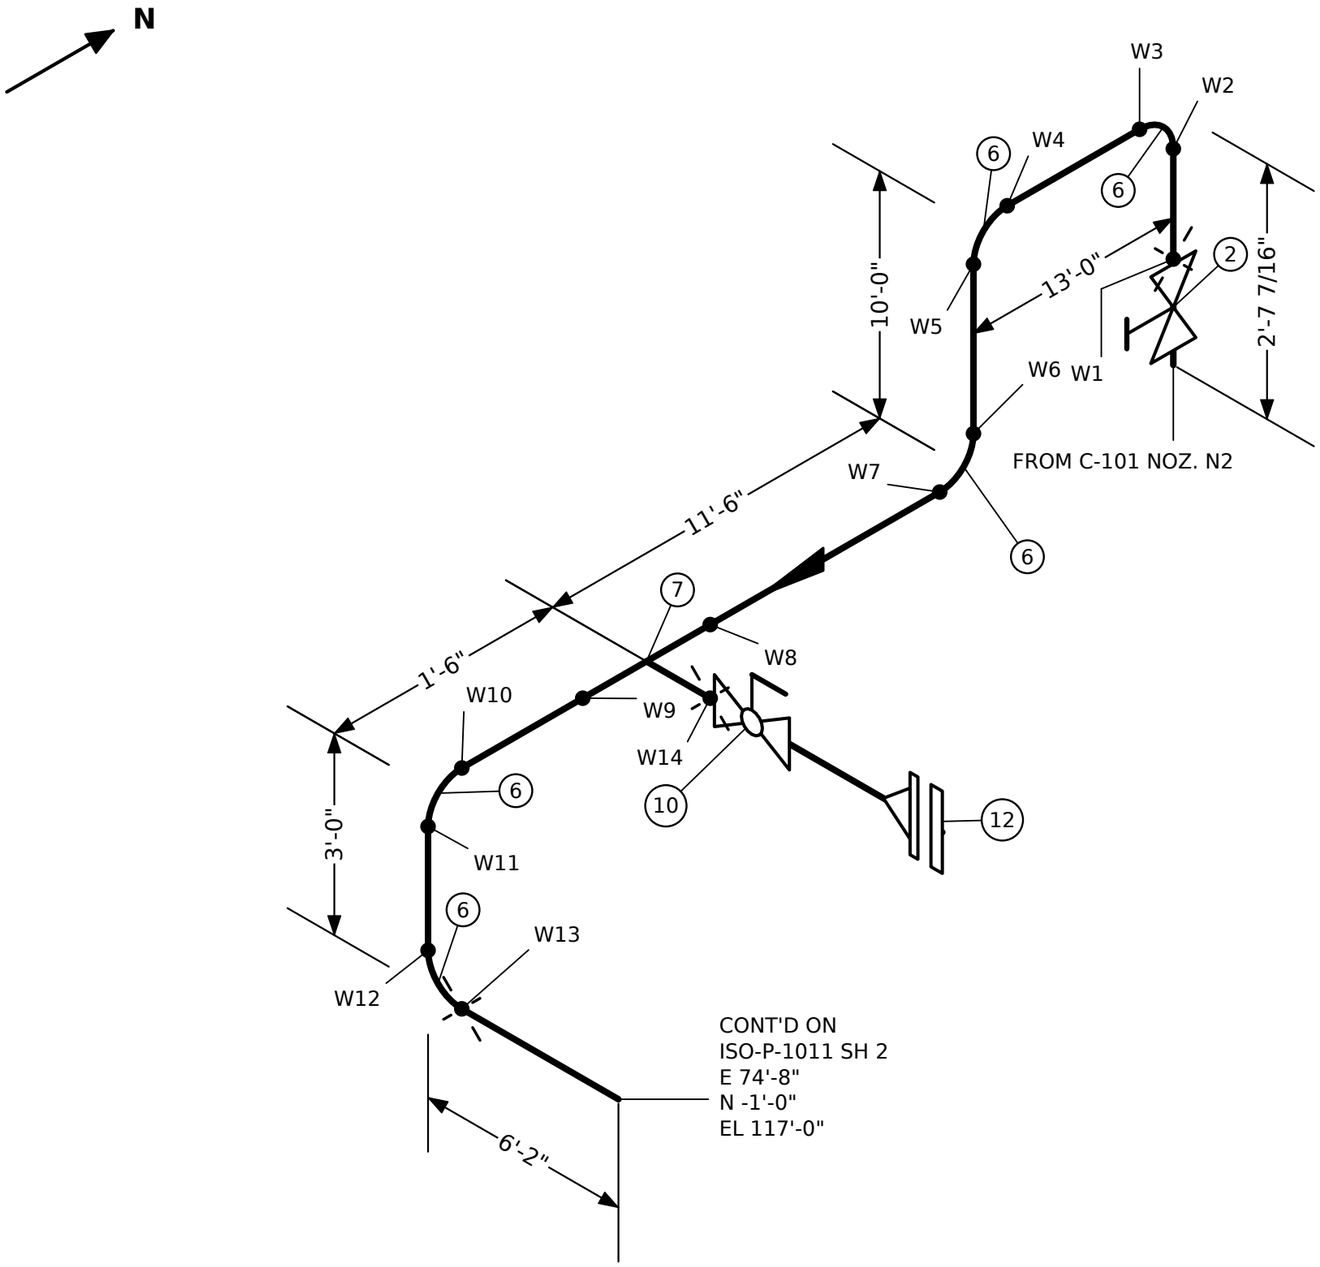


BILL OF MATERIALS

PT	QTY	NPS	DESCRIPTION
1	2	6"	GASKET 6" P300 COMPRESSED SHEET
2	1	6"	VALVE, GATE, WEDGE, OS&Y 6" P300
3	2	6"	STUD SET 8 × 0.625" × 4" WITH 2 NUTS, FOR 6" P300
4	1	6"	FLANGE WELD-NECK 6" P300 RAISED FACE
5	37'-1 1/4"	6"	PIPE 6" P300 BEVELLED ENDS
6	5	6"	ELBOW 90° R = 5/3 OD 6" P300
7	1	6"x3/4"	TEE REDUCING 6" × 3/4" P300
8	1	3/4"	FLANGE WELD-NECK 3/4" P300 RAISED FACE
9	2	3/4"	GASKET 3/4" P300 COMPRESSED SHEET
10	1	3/4"	VALVE, BALL, FLOATING 3/4" P300
11	2	3/4"	STUD SET 4 × 0.5" × 4-1/4" WITH 2 NUTS, FOR 3/4" P300
12	1	3/4"	FLANGE BLIND 3/4" P300 RAISED FACE

REV	DATE	DESCRIPTION	BY
0	2026-11-01	ISSUED FOR CONSTRUCTION	-

COMPANY

SMARTWELD

TITLE


HYDROCARBON PROCESS

NOTES:

1. ALL DIMENSIONS IN FEET AND INCHES UNLESS NOTED
2. BEVEL ENDS FOR BUTT WELD

TEST PRESS. -	INSULATION **NONE**	PAINT -	
PWHT -	NDE -	FLUID **P**	

LINE NO. **6"-P300-P-1011**	PIPING CLASS **H300**	DESIGN PRESS. **300 PSIG**	DESIGN TEMP. **-**
DRAWING NO. **ISO-P-1011**		SHEET **1 OF 2**	REV **0**
DATE **2026-11-01**	DRAWN **-**	CHECKED **-**	SCALE **NTS**

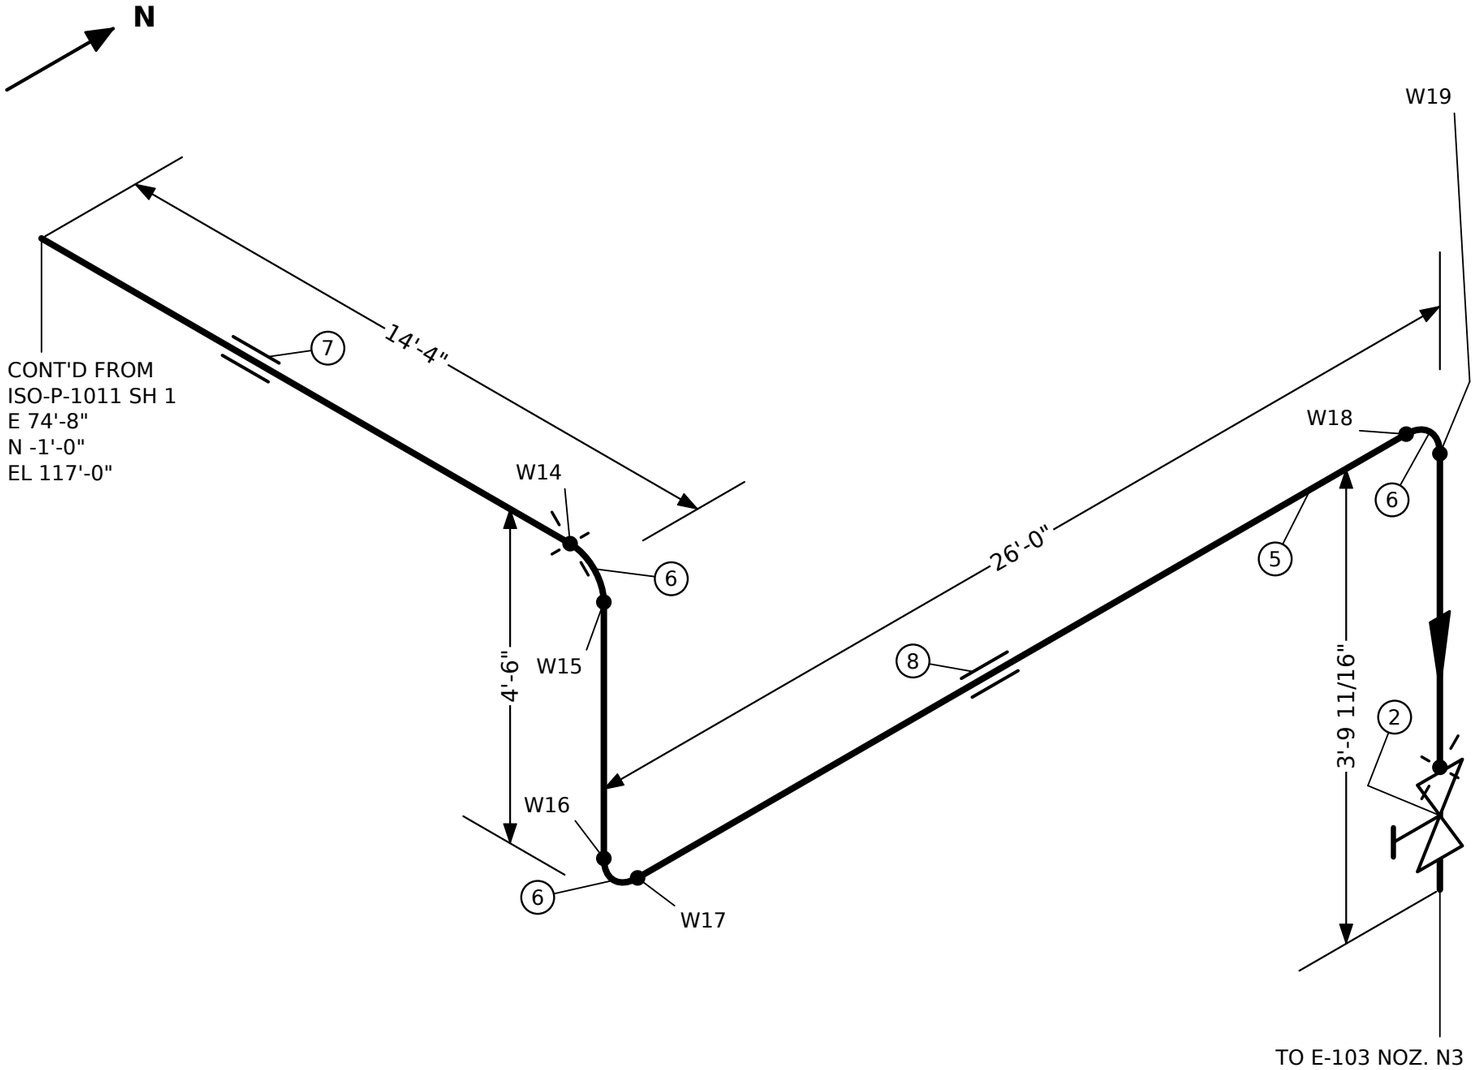

BILL OF MATERIALS

PT	QTY	NPS	DESCRIPTION
1	2	6"	GASKET 6" P300 COMPRESSED SHEET
2	1	6"	VALVE, GATE, WEDGE, OS&Y 6" P300
3	2	6"	STUD SET 8 × 0.625" × 4" WITH 2 NUTS, FOR 6" P300
4	1	6"	FLANGE WELD-NECK 6" P300 RAISED FACE
5	42'-1 1/2"	6"	PIPE 6" P300 BEVELLED ENDS
6	3	6"	ELBOW 90° R = 5/3 OD 6" P300
7	1	6"	ANCHOR FOR 6" LINE (ANCHOR-6)
8	1	6"	HANGER FOR 6" LINE (HANGER-6x238.0)

NOTES:
1. ALL DIMENSIONS IN FEET AND INCHES UNLESS NOTED
2. BEVEL ENDS FOR BUTT WELD

REV	DATE	DESCRIPTION	BY
0	2026-11-01	ISSUED FOR CONSTRUCTION	-

COMPANY

SMARTWELD

TITLE

HYDROCARBON PROCESS

TEST PRESS.	INSULATION	PAINT
-	NONE	-

PWHT	NDE	FLUID
-	-	P

LINE NO.	PIPING CLASS	DESIGN PRESS.	DESIGN TEMP.
6"-P300-P-1011	H300	300 PSIG	-

DRAWING NO.	SHEET	REV
ISO-P-1011	2 OF 2	0

DATE	DRAWN	CHECKED	SCALE
2026-11-01	-	-	NTS